

## Description

Mini PCB loader is suitable for SMT, FPC production line, providing semi-automatic loading, small volume designed to save space.

## Features

Small footprint

Easy to operate key control interface.

Closed fuselage structure ensures safe operation.

Smooth and parallel width adjustment (leadscrew)

Fast, stable, and accurate retrieval positioning

Double circulation tank chain structure

SMEMA compatible

## Technical specifications

Transfer direction: L to R or specify R to L

Transport height: 900mm  $\pm$  20mm

Conveyor speed: 6 seconds

Power supply: 110 VAC or 220VAC/50 Hz/1 Ph


Power consumption: 100VA max.

Belt type: ESD flat belt

PCB max weight:  $\leq$  2kg



Dimension (L*W*H.MM)	PCB size(MM)	Weight(KG)	Max PCB capacity
500*475*1400	50*50-330*250	90KG	50pcs (Cyclic)
600*650*1400	50*50-445*350	100KG	50pcs (Cyclic)

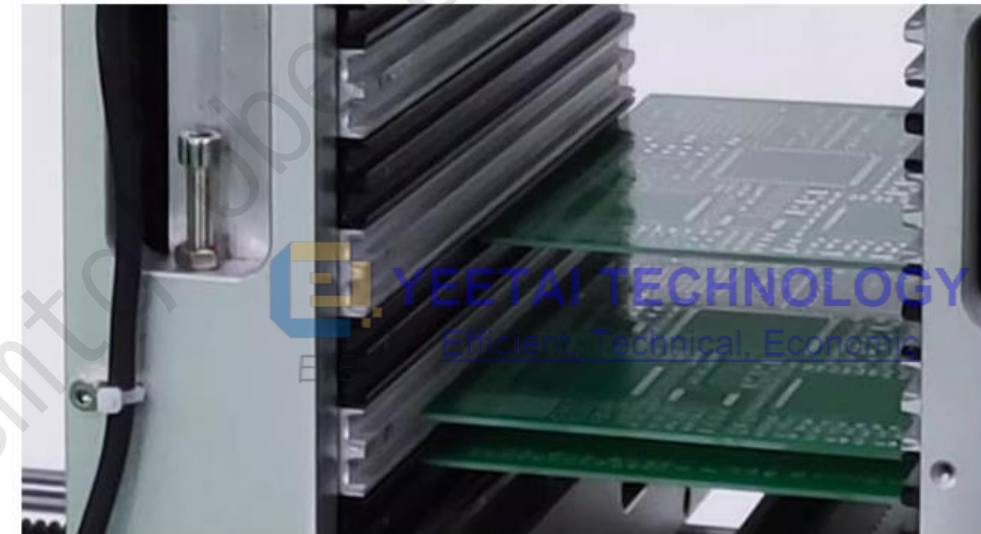



## Welcome inquiry

1, Please visit : [www.smtglobe.com](http://www.smtglobe.com)

2, Welcome to our factory in China

7, Looking forward to your email: [info@smtglobe.com](mailto:info@smtglobe.com)

8. Wechat/Whatsapp/skype: +86 13825296910