

## Description


*This unit is used when a passageway is required in a production line.*

## Features

- Lowering and lifting of gate conveyor. (Push button control).
- Locking cylinder to avoid opening during PCB transfer.
- Ergonomic air pressure supported opening and closing.
- Automatically gate lifting down by push button.
- Parallel and smooth width adjustment. (lead screw)
- SMEMA compatible.

## Technical specifications

- Transport height: 900mm  $\pm$ 20mm or specify.
- Transfer direction: L to R or specify R to L
- Belt type: ESD flat belt (round belt)
- Speed: 0.5-20m/min adjustable
- Cycle time: 15 seconds approx.
- Air Pressure & Air Consumption: 4-6 bar, 48ltr/Min
- Power supply: AC 110 Volts Or 220 Volts; Single Phase
- Power consumption: 100VA max. or specify.
- Load bearing: 1.5kg/PCB.
- Telescopic Length (Passageway): 600mm or specify.

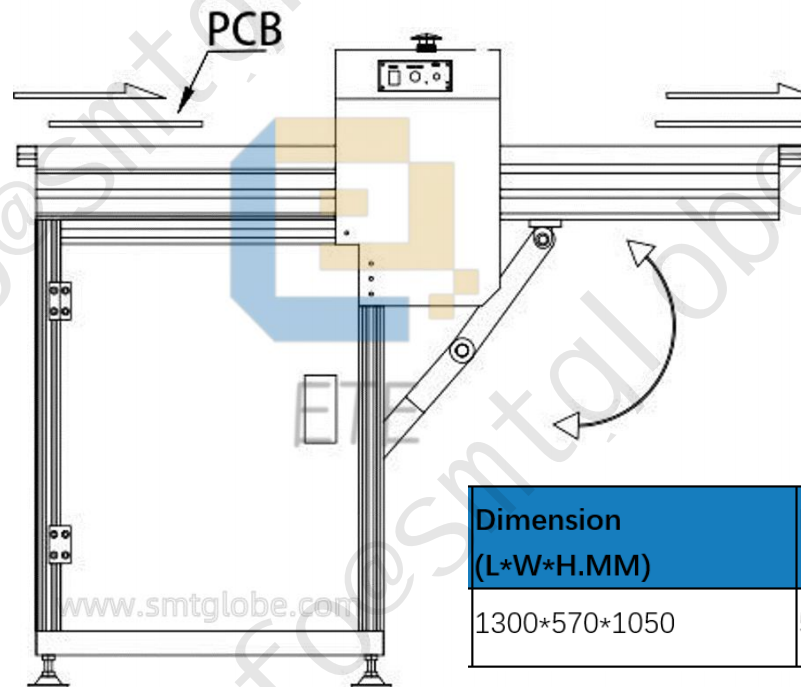

Dimension (L*W*H.MM)	PCB size (MM)	Weight (KG)	PCB Thickness
1300*570*1050	50*50-445*400	180KG	0.6~4 mm

## Welcome inquiry

1, Please visit : [www.smtglobe.com](http://www.smtglobe.com)

2, Welcome to our factory in China

4, Google: SMT AGV robot; Magazine rack AGV robot; Manual PCB depaneling machine

7, Looking forward to your email: [info@smtglobe.com](mailto:info@smtglobe.com)

8. Wechat/Whatsapp/skype: +86 13825296910