


Description

This unit is used for faulty boards which can be lifted up for visual inspection without interrupting the PCBs flow.

Features

- Modular design, touchscreen control.
- Includes 3 modes: 'reject', 'inspect' and 'pass through' .
- Stability enhanced by 'robust design'
- Ergonomically designed arm rest
- Smooth and parallel width adjustment
- Different lengths available upon request
- Variable speed control
- SMEMA compatible

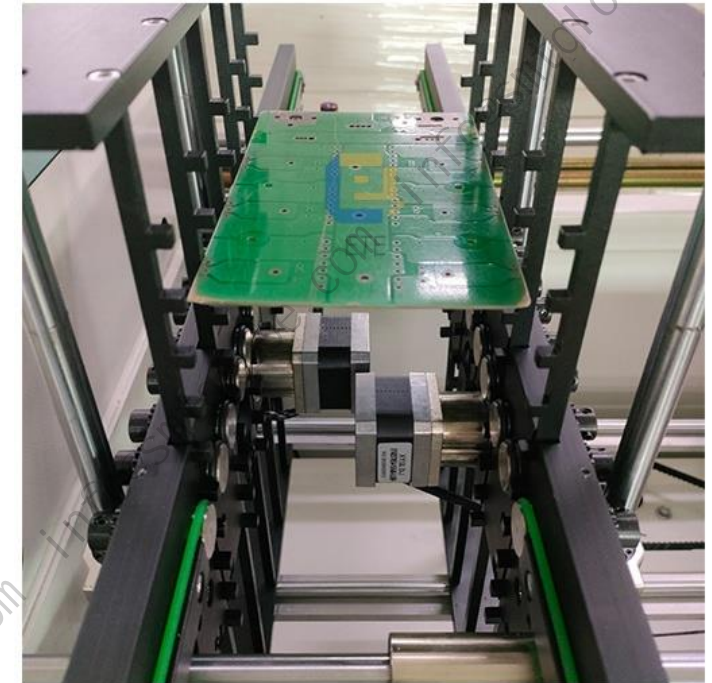

Transport height: 900mm ±20mm or specify
 Transfer direction: L to R or specify R to L
 Belt type: ESD belt (round belt)
 Speed: 0.5-20m/min adjustable
 Power supply: AC 110 Volts Or 220 Volts;
 Single Phase
 Power consumption: 100VA max. or specify
 Buffering capacity: 5 PCB or specify.

Model	Dimension (L*W*H.MM)	PCB size(MM)	Weight(KG)	Remark
ER-3505	500*665*900	50*50-445*350	50KG	no Lighting
ER -4605	500*795*900	50*50-460*460	70KG	no Lighting
ER-3510	1000*665*900	50*50-445*350	80KG	no Lighting
ER -4610	1000*795*900	50*50-460*460	105KG	no Lighting

Welcome inquiry

1, Please visit : www.smtglobe.com

2, Welcome to our factory in China

4, Google: SMT AGV robot; Magazine rack AGV robot; Manual PCB depaneling machine

7, Looking forward to your email: info@smtglobe.com

8. Wechat/Whatsapp/skype: +86 13825296910